



NOTE :

1. 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
2. CONDUCTIVE RESISTANCE : 3Ω MAX.
3. INSULATION RESISTANCE : 10MΩ Min/300VDC@10ms.
4. CONNECTOR IMPEDANCE : 85±15% ohm.
CABLE IMPEDANCE : 85±10% ohm.
5. THE PRODUCT MEETS PCIe 3.0.
6. THE DIMENSION MARKED ▼ SHOULD BE CHECKED.

8	WHITE LABEL, 50*10mm(REF.)	8
7	WHITE LABEL, 60*30mm(REF.)	1
6	PLASTIC BRAID SLEEVE, PET, BK	A/R
5	ACETATE TAPE, BK	A/R
4	DUST CAP FOR MCIO 8i, PE, NATURAL	1
3	MCIO 8X STR PULL TAB CABLE PLUG, AU30u", 85Ohm, V0	1
2	SATA CONN: 7P, F, AU15u", W/O LATCH, SOLDER	8
1	SAS CABLE : UL20744 (30AWG*2C+2D)+AM, BLUE, 85 Ohm	A/R
ITEM	DESCRIPTION	Q'TY

X1	-	PRODUCTION DRAWING			08/14/23	Woody Lee
REV.	ECR No.	DESCRIPTION			DATE	BY
TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN <i>Woody Lee</i>	DATE 08/14/23			
.XX ± 0.10		ENG'R <i>Woody Lee</i>	DATE 08/14/23			
.X ± 0.20		APP'R'D <i>Laurence Yu</i>	DATE 08/14/23			
X ± 1.0		UNIT MM	ROHS COMPLIANT YES	PART NO. 8060		
FRACT. ± 1/32"		SCALE -	SHEET 1 OF 2	MODEL FILE N/A	DRAWING NO. 10-5213110003-01	
ANGULAR ± 1°		REV. A				

WIRING TABLE

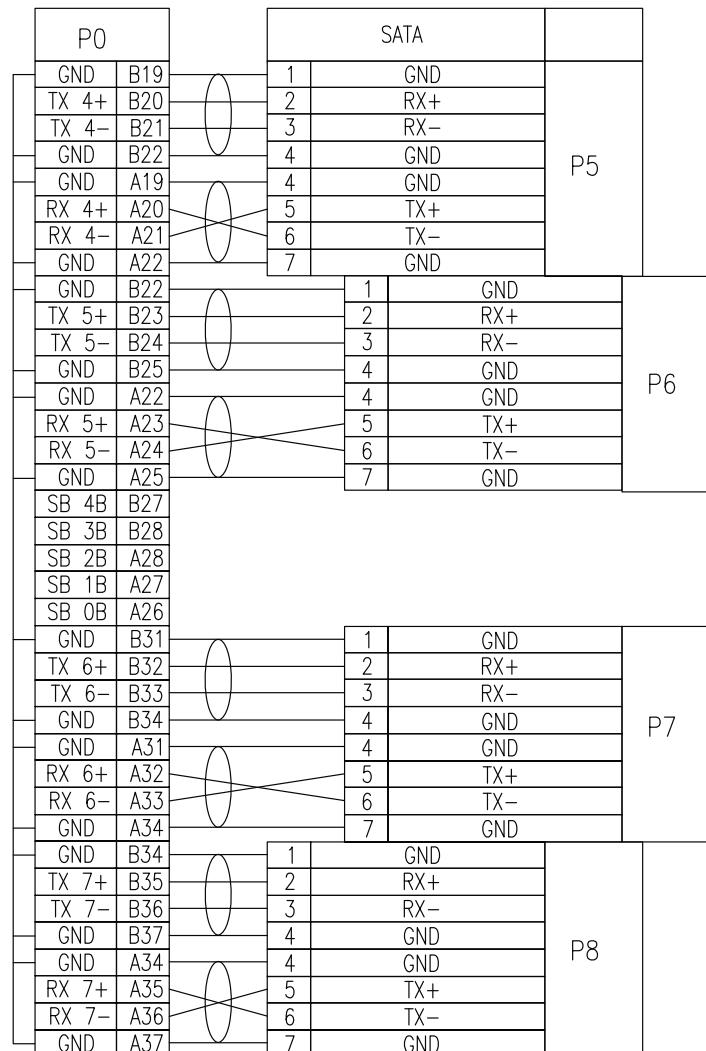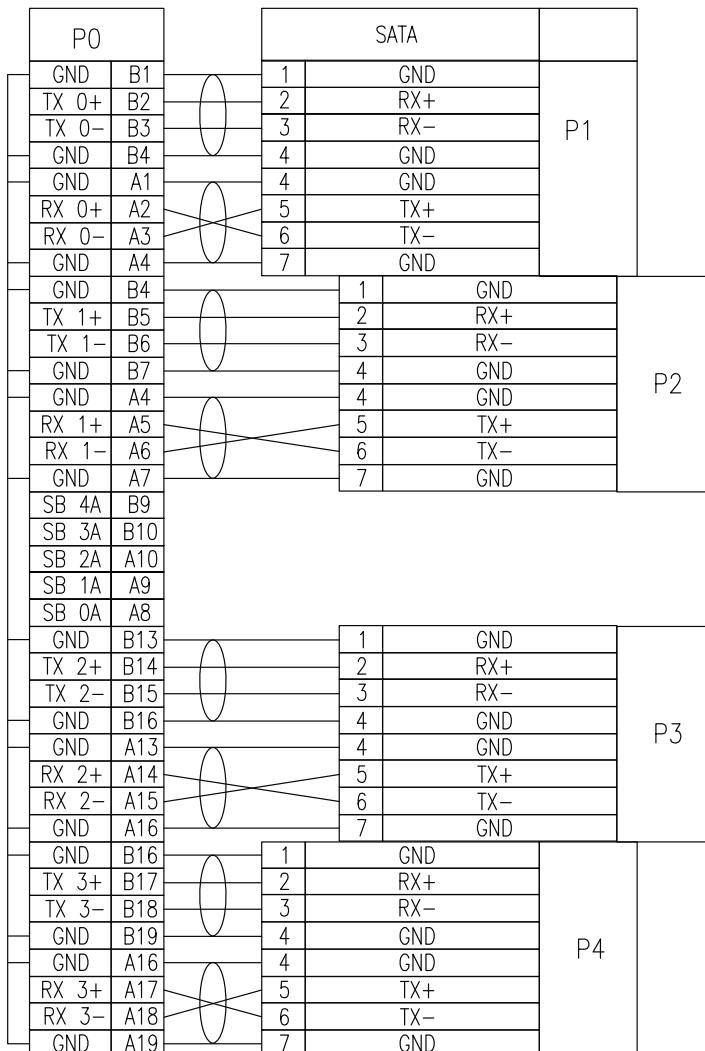

LABEL INFORMATION

