

# RM216


## 2U Open-Bay Server Chassis



Rear View



Inside View

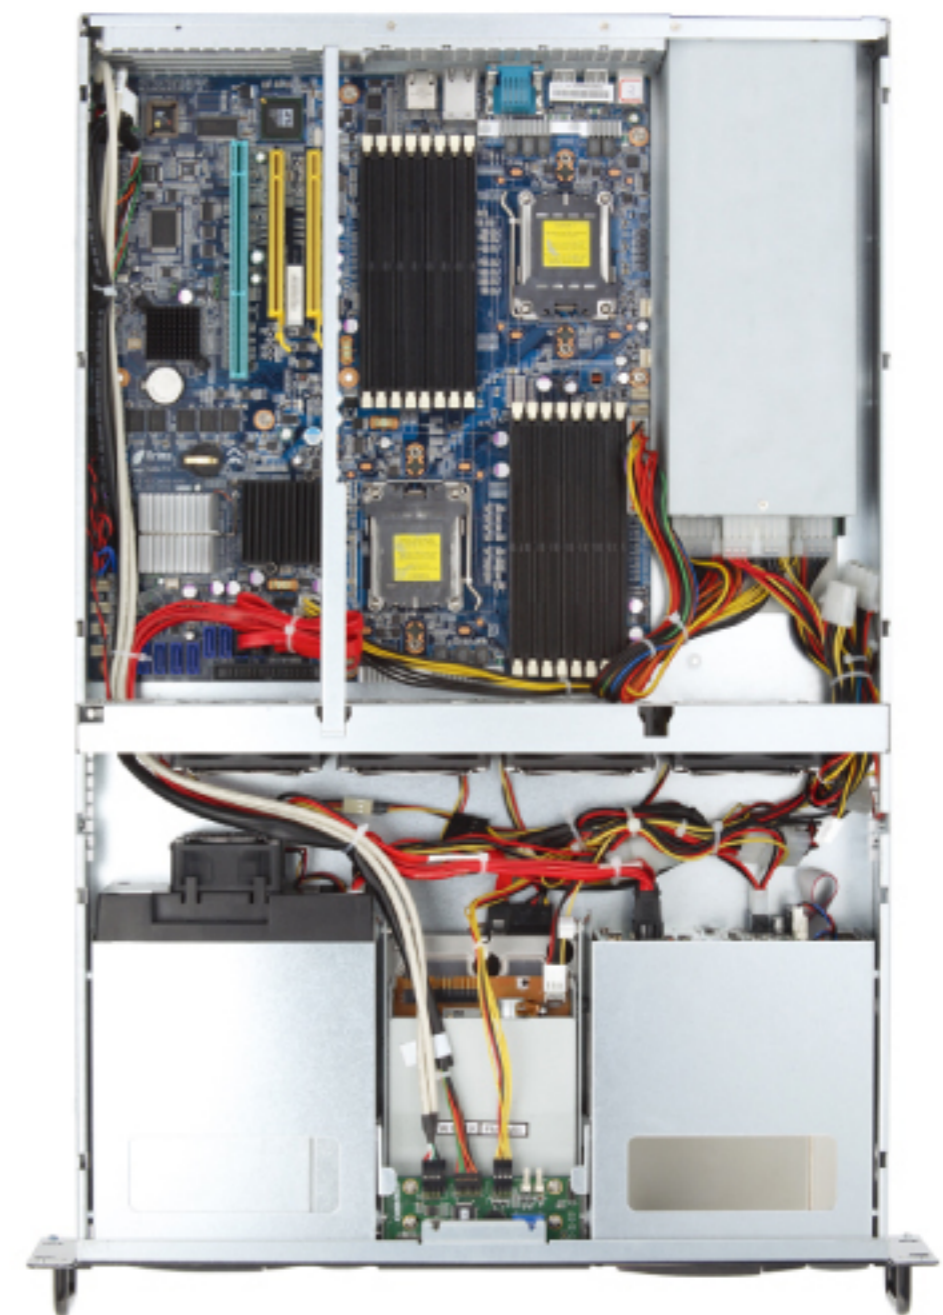

Front View



### Features & Benefits

- Open bay for versatile storage configuration
- Utilized 5.25" & 3.5" bays with Chenbro storage kits
- Tool-less design for easy maintenance
- Support low profile or standard rear window
- Outstanding thermal solution
- Tylersburg solution compliance

### Specification

<b>Model Name</b>	• RM21600
<b>M/B Form Factor</b>	• Extended ATX (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")
<b>Dimension (D×W×H)</b>	• 660 mm × 430 mm × 88 mm • 26" × 16.9" × 3.5"
<b>Drive Bay</b>	• External : 5.25" x 4, 3.5" x 2
<b>PSU</b>	• Form Factor : Single, Redundant • Watt : Up to 820 W
<b>Indicator</b>	• 1 x Power Status LED, 1 x HDD Activity LED, 2 x LAN Activity LEDs, 1 x Fan Failure & Overheat Warning
<b>Front Control</b>	• Power ON/OFF, Alarm Mute, System Reset, 2 x USB 2.0 Ports
<b>System Security</b>	• Intrusion Switch
<b>Cooling Fan</b>	• Front : N/A • Middle : 4 x 80 mm (T=32 mm) non hot-swap middle fans or optional 1 x 60 mm (T=25 mm) & 3 x 80 mm (T=32 mm) hot-swap middle fans • Rear : Optional 2 x 40 mm rear fans
<b>Slot Opening</b>	• 3 x full height or 6 x low profile
<b>Metal Thickness</b>	• 1.2 mm
<b>Net Weight (Chassis only)</b>	• 8.8 Kg
<b>Gross Weight (w/Packing)</b>	• 12.68 Kg
<b>Backplane</b>	• N/A
<b>Rear Window</b>	• Low Profile or Standard
<b>Front Bezel</b>	• Optional
<b>Cubic Feet</b>	• 4.26
<b>Container Info. (Single Packing)</b>	• 20' : 258 • 40' : 522 • 40'H : 578



4 x 5.25" bays for ODD or storage kits



2 x 3.5" bays for FDD or 3.5"/2.5" HDD with storage kits



Screwless lock for 5.25" bays



Optional screwless 4 x middle hot-swap fans



Changeable rear window for low profile